

Hi-MO **X10** Scientist

LR7-72HVD 630~635M

- Suitable for Distribution Market
- Peak efficiency with top power generation performance
- TaiRay wafer & BC technology enhances high product reliability
- More suitable for industrial and commercial cement roofs and high temperature scenarios



15-year Warranty for
Materials and Processing



30-year Warranty for Extra
Linear Power Output

Complete System and Product Certifications

IEC 61215, IEC 61730

ISO9001:2015: ISO Quality Management System

ISO14001: 2015: ISO Environment Management System

ISO45001: 2018: Occupational Health and Safety

IEC62941: Guideline for module design qualification and type approval

LONGi



23.5%
MAX MODULE
EFFICIENCY

0~3%
POWER
TOLERANCE


<1%
FIRST YEAR
POWER DEGRADATION

0.35%
YEAR 2-30
POWER DEGRADATION

BC-CELL
LOWER OPERATING
TEMPERATURE


Additional Value

30-Year Power Warranty

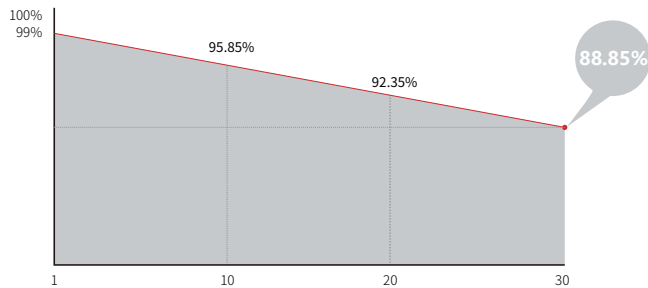

Mechanical Parameters

Cell Orientation	144 (6×24)
Junction Box	IP68, three diodes
Output Cable	4mm ² , +400, -200mm/±1400mm length can be customized
Glass	Dual glass, 2.0+2.0mm semi-tempered glass
Frame	Anodized aluminum alloy frame
Weight	33.5kg
Dimension	2382×1134×30mm
Packaging	36pcs per pallet / 144pcs per 20' GP / 720pcs per 40' HC

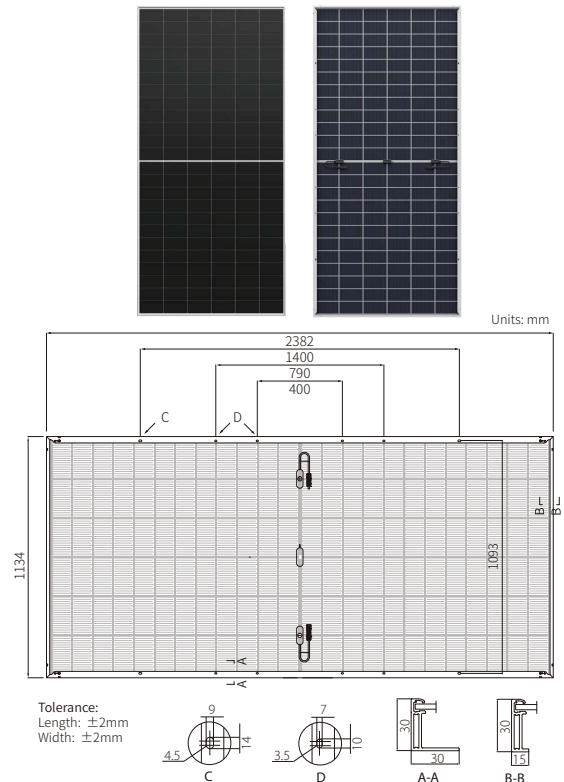

Electrical Characteristics

STC : AM1.5 1000W/m² 25°C

NOCT : AM1.5 800W/m² 20°C 1m/s

Test uncertainty for P_{max}: ±3%

Module Type	LR7-72HVD-630M		LR7-72HVD-635M	
	STC	NOCT	STC	NOCT
Testing Condition	STC	NOCT	STC	NOCT
Maximum Power (P _{max} /W)	630	480	635	483
Open Circuit Voltage (V _{oc} /V)	53.82	51.15	53.92	51.24
Short Circuit Current (I _{sc} /A)	14.81	11.90	14.89	11.96
Voltage at Maximum Power (V _{mp} /V)	44.47	42.26	44.57	42.36
Current at Maximum Power (I _{mp} /A)	14.17	11.36	14.25	11.42
Module Efficiency(%)	23.3		23.5	

Electrical characteristics with different rear side power gain (Taking 665W as the baseline)

P _{max} /W	V _{oc} /V	I _{sc} /A	V _{mp} /V	I _{mp} /A	P _{max} gain
688	54.32	15.98	44.97	15.30	5%
721	54.32	16.74	44.97	16.03	10%
755	54.42	17.50	45.07	16.76	15%
788	54.42	18.26	45.07	17.48	20%
821	54.42	19.03	45.07	18.21	25%

Operating Parameters

Operational Temperature	-40°C ~ +85°C
Power Output Tolerance	0 ~ 3%
Maximum System Voltage	DC1500V (IEC)
Maximum Series Fuse Rating	30A
Nominal Operating Cell Temperature	45±2°C
Protection Class	Class II
Bifaciality	70±5%
Fire Rating	IEC Class C

Mechanical Loading

Front Side Maximum Static Loading	5400Pa
Rear Side Maximum Static Loading	2400Pa
Hailstone Test	25mm Hailstone at the speed of 23m/s

Temperature Ratings (STC)

Temperature Coefficient of I _{sc}	+0.050%/°C
Temperature Coefficient of V _{oc}	-0.200%/°C
Temperature Coefficient of P _{max}	-0.260%/°C